



## Features


- Premium Metal Construction
- Brushed Nickel Finish
- Detachable Pull-Down Spray-Head with Nylon FlexHose
- Single lever design for easy one-handed control of water flow and temperature.
- Dual Mode (Spray or Stream) Neoperl Honeycomb Nozzle & Easy Clean Silicone.
- Kerox Cartridge, tested to 500,000 cycles
- Limited Lifetime Warranty

## Codes/Standards

ASME A112.19.3/CSA B45.4

1-(503) 455-8336

Product specifications may change without notice. Please visit [www.TigorSinks.com](http://www.TigorSinks.com) for the most current information. Updated 02/19/2019

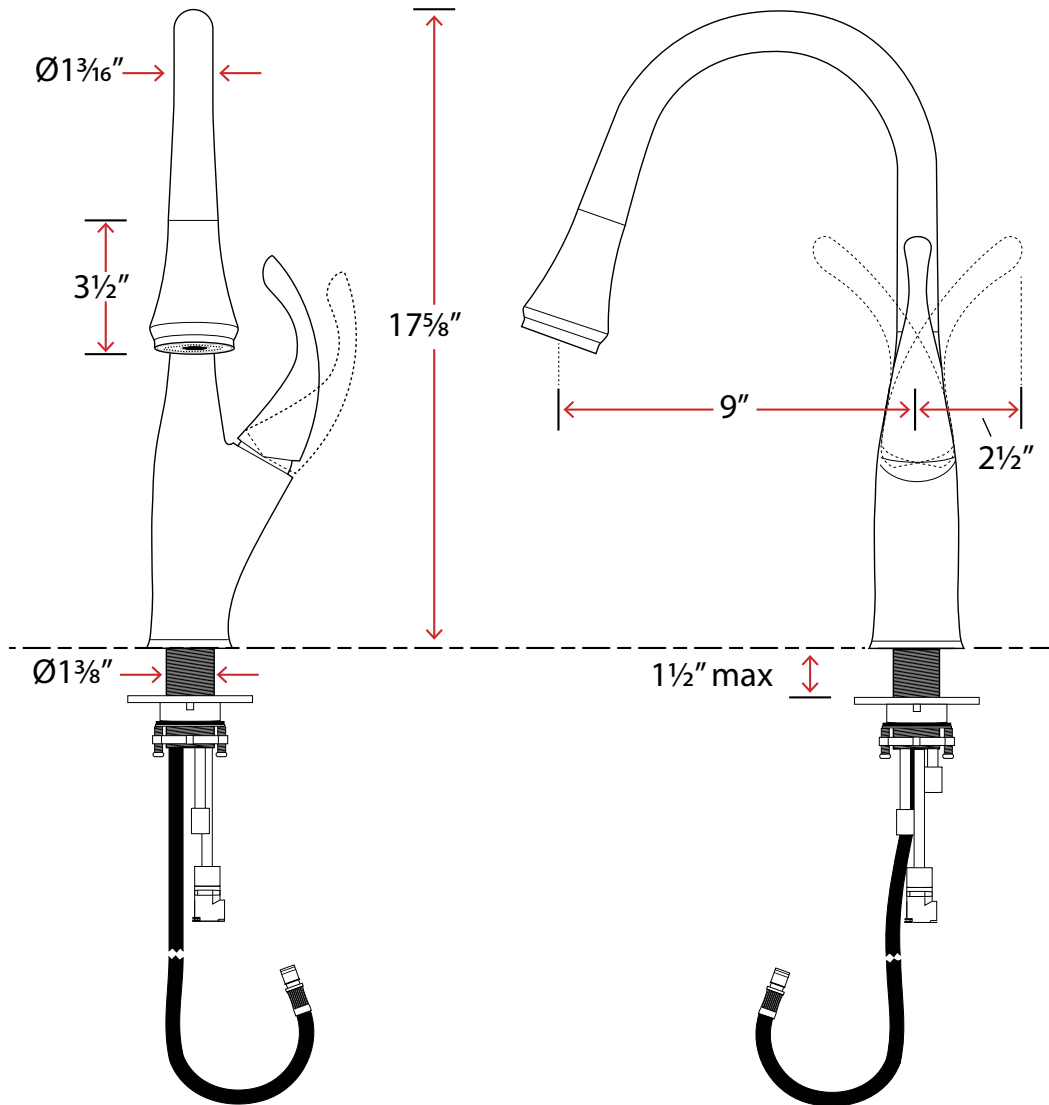

## Technical Information

- Faucet Collection: **Boden Series**
- Faucet Model Number: **GF75-S**
- Faucet Spout Reach (inches): **9**
- Faucet Height (inches): **17 5/8**
- Flow Rate (60psi): **1.8 GPM**
- Maximum Deck Thickness (inches): **1 1/2**
- Installation Type: **Countertop**
- Mounting Shank Diameter (inches): **1 3/8**
- Hole Size (inches): **1 3/8 min, 1 1/2 max**
- 1 Hole Installation

1-(503) 455-8336

Product specifications may change without notice. Please visit [www.TigorSinks.com](http://www.TigorSinks.com) for the most current information. Updated 02/19/2019